

CE

Temperature sensor PTC

Manufactured in accordance with DIN 44081 and 44082
Arranged for the temperature control of the windings of transformers and motors


Response temperature: from 60 °C to 180 °C
Fast response type

Cable in PTFE (std 3 m) further lengths on request
Ø of the sensor: 3 mm
Lead cross-section: 0,14 mm²

Sensore termometrico PTC

Termistori a Norme DIN 44081 e 44082
Per il controllo della temperatura degli avvolgimenti di trasformatori e motori.
Temperature di intervento: da 60 °C a 180 °C

Tipo ad alta sensibilità
Cavo in PTFE (std 3 m) altre misure a richiesta
Ø del sensore: 3 mm
Sezione del cavo: 0,14 mm²

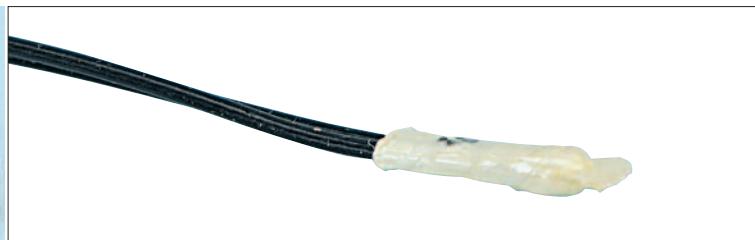

Colour coding (other colour combinations on request-customer spe-

Nominal response temperature T_{NF} (°C)	Colouring leads	
90	green	green
100	red	red
105	blue	grey
110	brown	brown
115	blue	green
120	grey	grey
125	red	green
130	blue	blue
135	red	brown
140	white	blue
145	white	black
150	black	black
155	blue	black
160	blue	red
165	blue	brown
170	white	green
180	white	red
190	black	brown

